

MECHANICAL:

SPECIFICATION NOTES:

ELECTRICAL:







- 1. VOLTAGE RATING: 125 VAC RMS
- 2. CURRENT RATING: 1.5 AMP
- 3. CONTACT RESISTANCE: 30mΩ MAX.
- 4. INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
- 5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

- 1.SHIELD: SUS304 T=0.2MM, Finish: 30u" Nickel
- 2. HOUSING /INSERT MATERIAL:  
THERMOPLASTIC, PA9T UL94V-0,COLOR BLACK
- 3. CONTACT MATERIAL:PHOSPHOR BRONZE T=0.30MM
- 4. PLATING:GOLD PLATING OVER NICKEL, PLATED NICKEL 30-50U". TIN 100-120U". GOLD PLATED ON CONTENT AREA 1U/3U/6U/15U/30U/50U"
- 5. OPERATING LIFE:750 CYCLES MIN.

ENVIRONMENTAL:

- 1. STORAGE: -10° C TO +75° C
- 2. OPERATION: -40° C TO +85° C

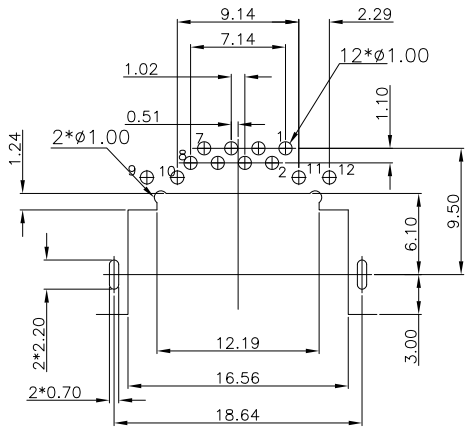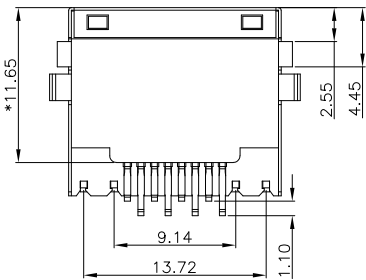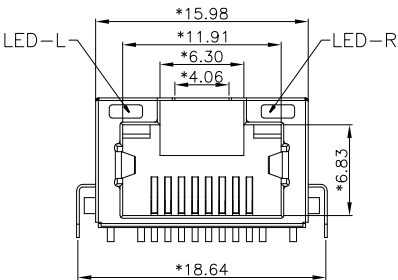

RECOMMENDED PCB LAYOUT  
RECOMMENDED PCB THICKNESS: 1.2-1.5mm.  
TOLERANCE: ±0.05 (TOP VIEW)

LED ELECTRICAL CHARACTERISTIC				
Yellow 9 10 LEFT LED		Green 11 12 RIGHT LED		

Standard LED	Wavelength	Forward V (Min/Max)	Forward A	Type
Green	568nm	1.8V/2.8V	20mA	squareness
Yellow	585nm	1.8V/2.8V	20mA	squareness

ZXCNT

深圳市朱讯电子有限公司  
SHEN ZHEN ZXCNT ELECTRONICS CO.,LTD.

TEL: 0755-89885256	TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.35 mm	DESIGNED 设计	YUAN	TITLE 图名	Shielded RJ45 Modular Jack,Through Hole Type, Offset H9.85			
E-Mail:slaes@zxcnt.com		CHECKED 审核	YE	PART NO. 料号	ZXRJ-M60191-21-WL			
HTTP:www.zxcnt.com		DATE 日期	2021-10-22	SCALE 比例	1 : 1	UNIT 单位	mm inch	